



# AG

Product name:

Operating limits:

6 Bar


5 m/s

-40°C... + 200°C



Specifications:

| Type      | d1   | d3   | L    |
|-----------|------|------|------|
| 1134/149  | 14   | 30.7 | 13.5 |
| 1120/137  | 14   | 33.7 | 13.5 |
| 1134-A794 | 16   | 30   | 16   |
| 1119/115  | 17   | 36.8 | 14   |
| 1121/153  | 17   | 36.8 | 14   |
| 1122/154  | 17   | 36.8 | 14   |
| 1123/129  | 17   | 36.8 | 14   |
| 1126/155  | 17   | 36.8 | 14   |
| 1136/129  | 17   | 36   | 27   |
| 1121-A269 | 18   | 36.5 | 19   |
| 1119-A267 | 18   | 36.5 | 19   |
| 1128-A730 | 19   | 40   | 24.4 |
| 1128/139  | 20   | 40   | 14.5 |
| 1128-A779 | 20.6 | 39.7 | 21   |
| 1135      | 25   | 43   | 23   |
| 1129/302  | 25.4 | 47.5 | 17   |

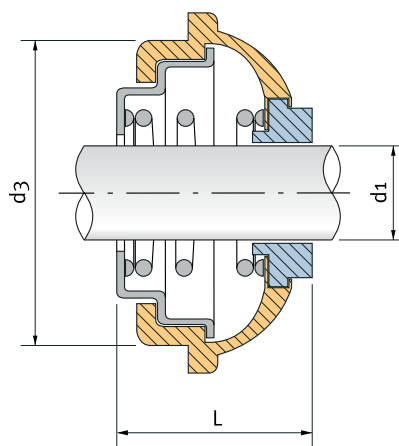

-  Stationary Ring (Ceramic/SiC/TC)
-  Secondary Seal (NBR/EPDM/VITON)
-  Spring and Other Parts (S.S./SUS304/SUS316/Copper)