

Product name:

AT

Operating limits:

Pressure: 6 Bar





Speed: 10 m/s


Temperature: -30°C... + 200°C



Specifications:

Type	d1	d3	d7	L1	L3
AT 6	6	18	22	14	4
AT 8S	8	18	22	15	4
AT 8M	8	20	22/26	15	4/5.5
AT 8	8	24	22	15	5
AT 10	10	24	26	21	8
AT 11	11	24	26	21	8
AT 12	12	24	26	21	8
AT 13	13	24	26	19.5	5.5
AT 13L	13	28	28	21	8
AT 13H	13	32	29.5	30.5	8
AT 14S	14	28	28.5	21	8
AT 14	14	32	29.5	21	8
AT 15S	15	28	28.5/30	21	8
AT 15	15	32	29.5	21	8

-  Stationary Ring (Ceramic/SiC/TC)
-  Rotary Ring (Carbon/SiC/TC)
-  Secondary Seal (NBR/EPDM/VITON)
-  Spring and Other Parts (S.S./US304/SUS316)

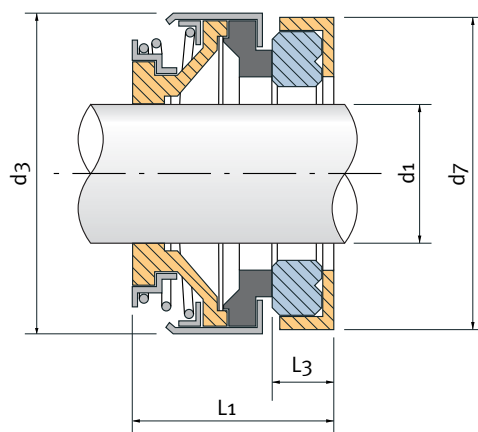

AT

Specifications:

Type	d1	d3	d7	L1	L3
AT 15L	15	39	38	21	8
AT 16S	16	28	29.5/30	21	8
AT 16	16	32	29.5	21	8
AT 16×39	16	39	38	21	8
AT 17	17	39	42	21	8
AT 18	18	39	42	21	8
AT 19	19	39	42	21	8
AT 20	20	39	42	21	8
AT 20×42	20	42	45	23	10
AT 22S	22	36	45	26.5	10
AT 22	22	42	45	23.5	10
AT 23	23	47	50	23.5	10
AT 24	24	47	50	23.5	10
AT 25×42	25	42	50	23.5	10
AT 25	25	47	50	23.5	10
AT 26	26	47	50	23.5	10
AT 27	27	47	50	23.5	10
AT 28	28	54	57	25	10
AT 30	30	54	57	25	10
AT 32	32	54	57	25	10
AT 35	35	60	63	26	10
AT 38	38	65	68	30	12
AT 40	40	65	68	30	12
AT 45	45	70	73	32	12
AT 50	50	85	88	38	15
AT 55	55	85	88	38	15
AT 60	60	105	110	45	15

